


GEMINI-DB

DIGITAL DUAL BAND ARPA RADAR SYSTEM



X-band


K_a-band

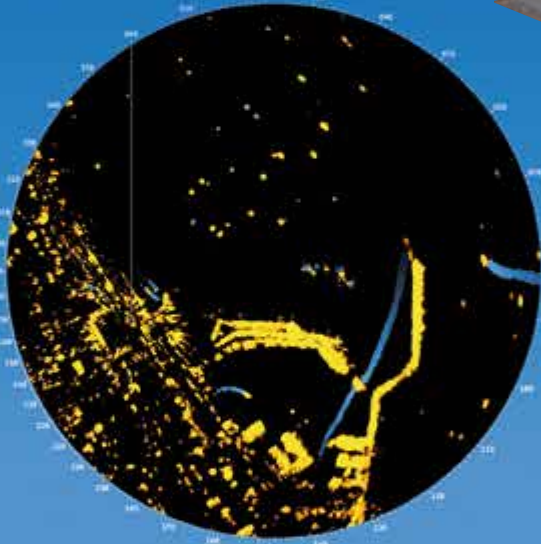


GEMINI-DB digital dual-band ARPA radar offers operational advantages and flexibility of operations thanks to the simultaneous use of X and K_a-band frequencies.

GEMINI-DB can be either used in stand-alone configuration or integrated into other systems or networks:

- Navigation stand-alone marine ARPA radar or interfaced with integrated Bridge Systems
- Port Security or surveillance of critical infrastructures (off-shore platforms, nuclear power plants, oil refineries, etc.)
- SMGCS (Surface Movement Guidance and Control Systems) for airport ground control
- “Gap-Filler” radar in conjunction with a primary surveillance radar sensors
- Primary radar sensor to detect small surface targets using its outstanding azimuth and range discrimination.

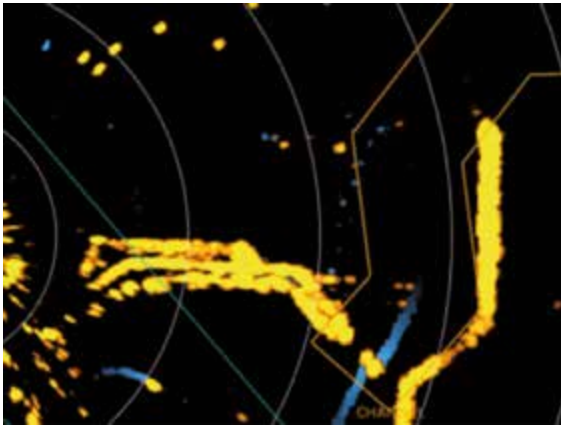

GEMINI-DB simultaneously use X and K_a-band frequencies to allow seamless coverage of surveillance area.

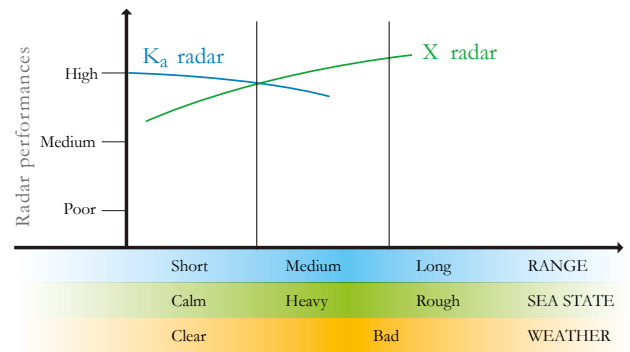

Three modes of independent operations:

1. X-band
2. K_a-band
3. Combined X and K_a-band

US NAVY has recently acquired and successfully tested GEMINI-DB radar in sea trials along the coast of California.



Italian Navy successfully tested and employed GEMINI-DB radar for interdiction and search-and-rescue missions in the Mediterranean (2013, Lybra vessel)

GEMINI-DB delivers superior target detection and discrimination at an optimized cost/performance ratio.

GEMINI-DB complies with the following regulations for X-Band Maritime navigation and radio communication equipment and Systems.

- IEC 60945
- IEC 60936-1
- IEC 60872-1
- IEC 61162-1




X

Advanced Fully Solid State Digital Radar sensor

Main features:

- Frequency Diversity
- Accurate target detection
- Coherent, pulse compression, Doppler, digital signal processing, clutter rejection
- Active and Passive Built-In-Test (BIT) for immediate fault localization in support of all-level maintenance activities
- LPI mode with user-selectable transmitter power level (option)

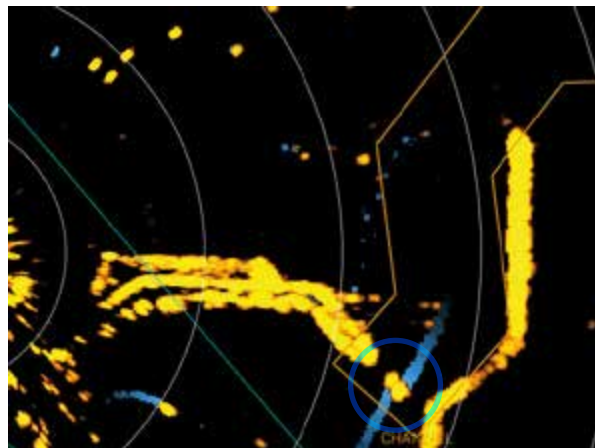

X-band not able to separate targets properly

K_a

Highly-discriminating digital K_a-band radar sensor

The high sensitivity of the receiver and resolution of the




K_a-band super-directive antenna allows excellent performance also

- To detect very fast small target
- To detect submarines periscopes
- To discriminate very close targets (up to 2 m distances)
- To increase the safety of the ship in every operative condition

special operations:

- Narrow waterways
- Port Approach Control systems with security missions

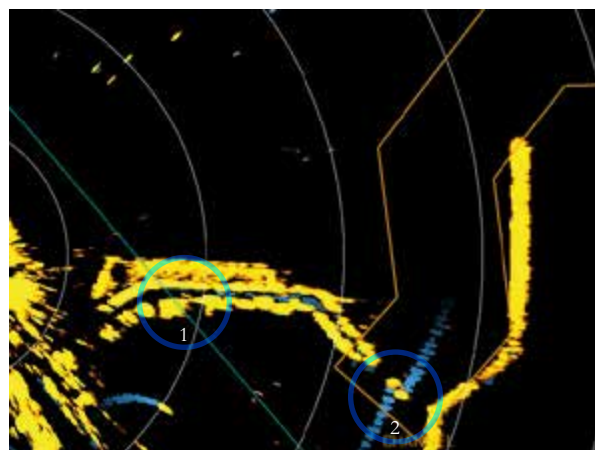

1 Identify very small targets immersed in clutter

2 K_a-band able to separate targets


X-K_a

GEMINI-DB provides clear and unmatched targets definition.

Large set of functions are available to the operator through an extremely friendly user interface.

Procedures and operational modes are selected in the screen through trackball:

- All basic radar settings (FTC, STC, Tune, Gain, interference rejection, PRF-PW)
- On-screen graphics (EBL, VRM, cursor a position, navigation graphics)
- ARPA processing is also performed using X, K_a or X-K_a mode.
- Navigation mode including true motion AIS track superposition and fusion
- Track data available on LAN for CMS

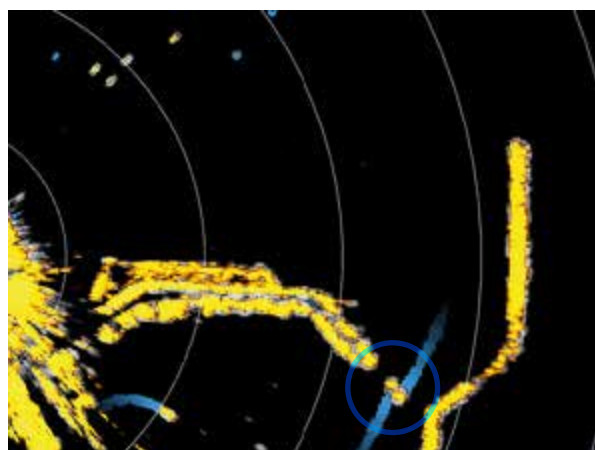

Combined radar video is able to separate and maintain proper detection with both bands

GEMINI-DB

Video channel selection

- X
- K_a
- X, K_a combined

Filter status

- Tune and tune control
- Gain control
- STC control
- FTC control

Current setup

AIS/ARPA Setup

The System provides a function that correlates ARPA and AIS targets based upon a correlation algorithm that takes into account course/speed difference and distance between the two targets.

Ownship data

- Latitude and data source
- Longitude and data source
- Absolute speed and data source
- Course and data source
- Heading and data source
- Speed and data source
- Drift speed and data source
- Drift course and data source

Alarms window

In this window are displayed the main alarm messages generated by the radar; the top rows are dedicated to the most important alarms whereas the last row is used to report the last alarm received.

Messages window

Main messages generated by the System to:

- advise the operator about the outcome of his/her operations;
- Provide instruction to the operator to perform the selected procedure. In this case, the window background switches between light and dark blue until the function is ended;
- show the causes that prevented the execution of a requested operation.



EBL / VRM and cursor data
(range, bearing, latitude and longitude)

Screen shortcuts area

Operating panel for quick access to:
auto acquis. - HL off - menu - pulse - ppi cent - ownship - plot - delete target - vector time - select alarm

ANTENNAS AND ROTATING UNIT

	X	K _a
Length	9 feet	8 feet
Slotted waveguide array	horizontally polarized	circularly polarized
Horizontal beamwidth to -3dB	≤ 0.85°	≤ 0.26°
Vertical beamwidth to -3dB	< 25°	< 7.5°
Sidelobes within 10°	less than - 26 dB	
Sidelobes outside 10°	less than - 30 dB	
Gain	31 dBi ± 0.5 dB	40 dBic ± 0.5 dB
Rotation speed	22/11 rpm (depending on range selected)	
Tolerable relative wind speed	100 knots (operative) - 120 Knots (non operative)	

TRANSMITTERS

	X	K _a
Peak power (nominal)	50, 100, 200, 400 W (Fully Solid State)	10 kW (Magnetron)
Frequency	between 9,300 and 9,500 MHz	between 33,600 and 34,200 MHz
Pulse widths and PRFs:	from 0.05 to 93 µs; from 350 to 2500 Hz	0.05 µs (short) 4000 Hz 0.15 µs (long) 2000 Hz
Mode	Frequency Diversity	+8% of the PRF, pseudorandom; it can be activated/disactivated by the operator.
Sector blanking	available	

RECEIVERS

	X	K _a
Type	Fully solid state	
Detection	27 dB pulse compression gain	diode detector
I.F. bandwidth	up to 40 MHz	33 MHz with short pulse, 7 MHz with long pulse
Dynamic range (nominal)	> 100 dB with compression gain (> 130 dB with optional RF STC)	80 dB
Tuning	not applicable	automatic and manual

DISPLAY UNIT

Presentation | MMI and symbols and colours as per IMO/IHO recommendations, 23" colour LCD

	X													
	K _a													
Range scale (n. miles)	0.0625	0.125	0.25	0.5	0.75	1.5	3	6	12	24	48	72	96	
Ring spacing (n. miles)	0.0312	0.0625	0.125	0.125	0.125	0.25	0.5	1	2	4	8	12	16	
Rings	2	2	2	4	6	6	6	6	6	6	6	6	6	

Range discrimination better than 20 m on 10 m² target with short pulse (X-band), better than 15 m on 10 m² target with short pulse (K_a-band), (on the 0.75 nm range scale)

Azimuth discrimination better than 1.0° (X-band), better than 0.4° (K_a-band)

INTERFACES

Input signals

- GEM's Fiber Optic Gyrocompass (FOG) series or equivalent laser-based gyrocompass: digital, standard NMEA0183;
- Positioning Systems: Digital, standard NMEA0183 for radio navigation and satellite systems (NAVSTAR GPS / OMEGA TRANSIT / LORAN C etc.);
- Log: Digital, standard NMEA0183;
- AIS: Digital, standard NMEA0183;
- TLC (reserved to future use): Digital, standard NMEA0183.

Output signals

- Bidirectional RS422 serial lines (one of them can be set as RS232, configurable) to provide target data;
- RS-343 standard RGB signal for repeater monitor;
- Digital outputs, open collector;
- Ethernet LAN 100 MB, for radar video distribution.

POWER REQUIREMENTS

Input Voltage	115 Vac, 50 ÷ 60 Hz, 1 Φ (220 Vac accepted on request)
Power absorption	≤ 1500 W







ENVIRONMENTAL PERFORMANCE


As per IEC 60945 standard:

Temperature	internal units	from - 15°C to + 55°C
	external units	from - 25°C to + 55°C
	storage	from - 30°C to + 70°C
Humidity	93% at 40°C non-condensing (up to 100% at + 40°C with de-hydrator)	
Vibrations	sweep 2 Hz ÷ 13.2 Hz at ± 1 mm / 13.2 Hz ÷ 100 Hz at 7 m/s ² and for 2 h on each resonance, otherwise 2 h at 30 Hz in all three axes	
Shock	6 drops from 1 m	
Enclosure	IP65 waterproof	

GEMINI-DB

OUTLINE DRAWINGS - all dimensions are in mm

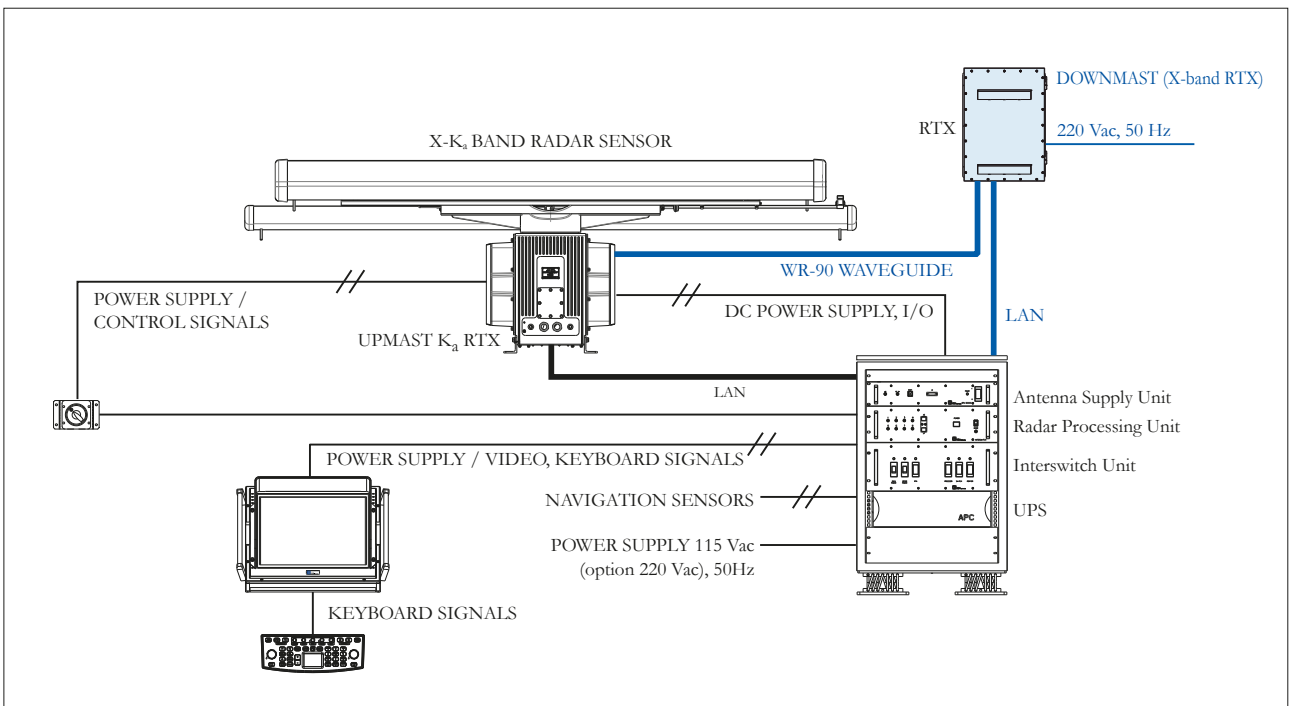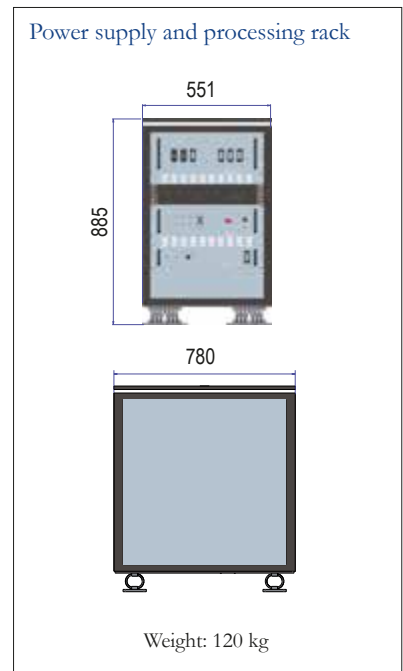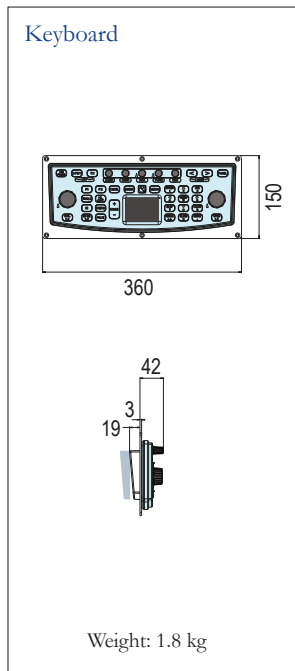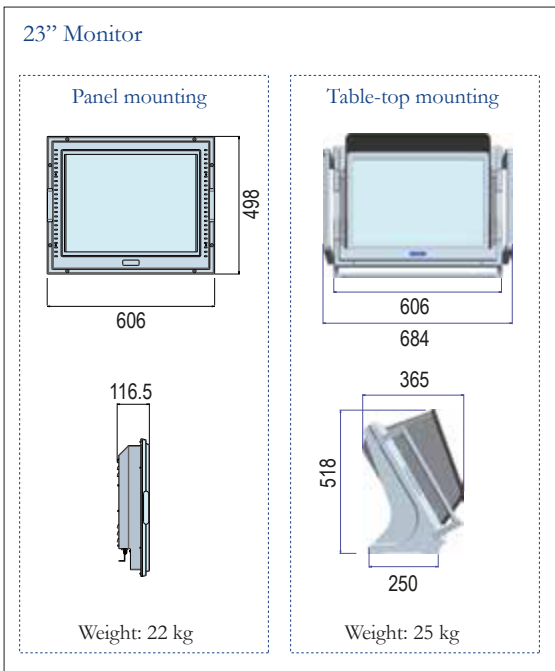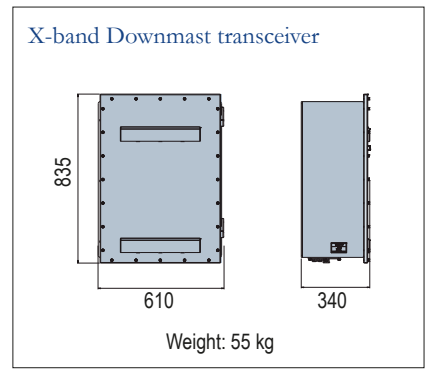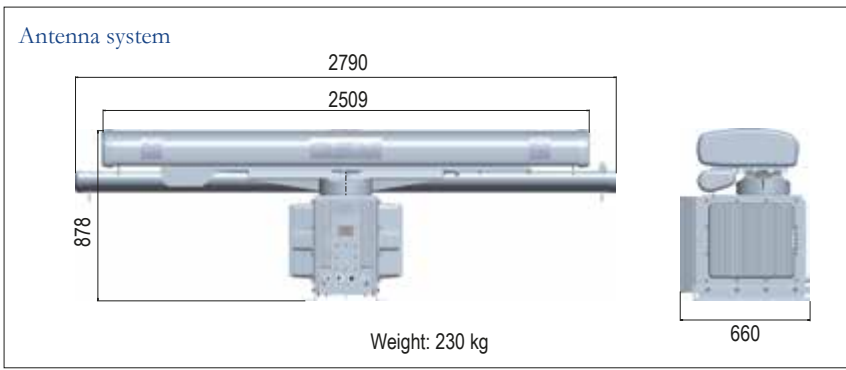

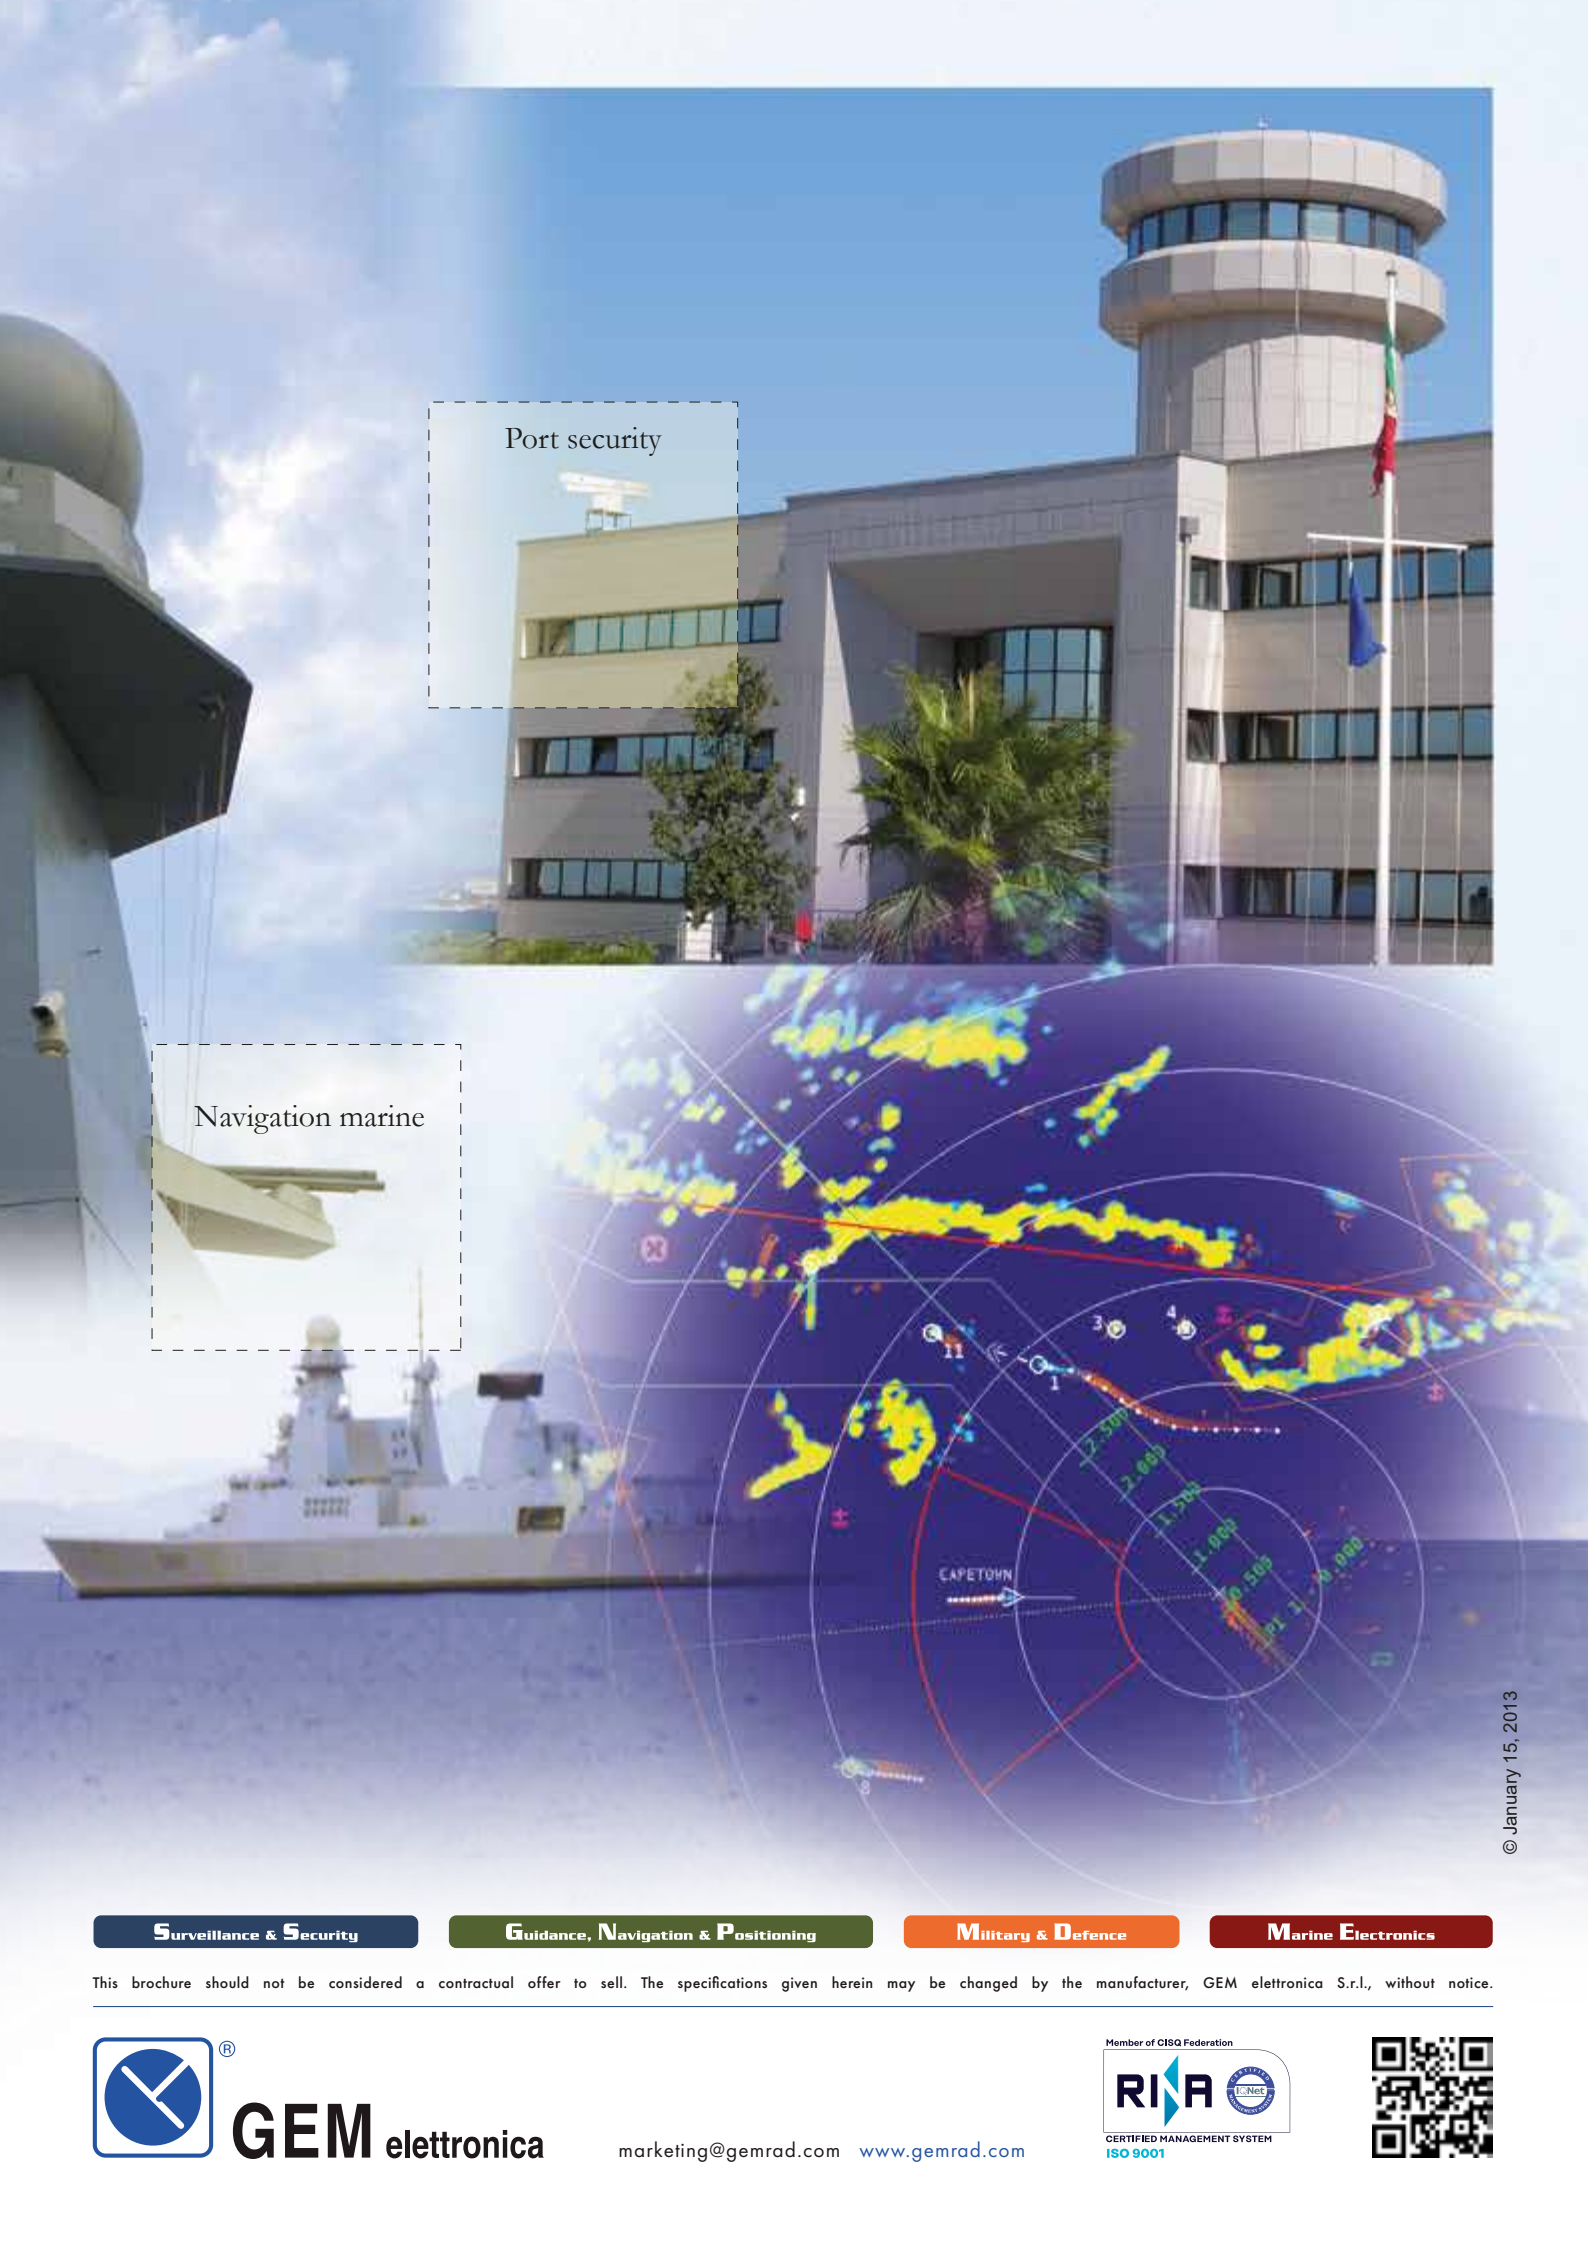

Port security

Navigation marine

© January 15, 2013

Surveillance & Security

Guidance, Navigation & Positioning

Military & Defence

Marine Electronics

This brochure should not be considered a contractual offer to sell. The specifications given herein may be changed by the manufacturer, GEM elettronica S.r.l., without notice.



marketing@gemrad.com www.gemrad.com

