



RADAR ANTENNAS SERIES ASX-2101/FD • ASX1901/FD

GENERAL DESCRIPTION

The GEM elettronica ASX-2101/FD • ASX-1901/FD Series takes all advantages offered by the radar frequency diversity technique while keeping high azimuth discrimination. The variation of squint allows helps clutter de-correlation as the bands of frequency are well separated, however the electrical characteristics of radiation are still kept. Both linear horizontal and circular polarization are available, so making this series the choice for virtually all shore-based radar installations.

Maintenance-free, the antennas comply with the most severe environmental requirements and the rotation rate can be remotely selected.

FEATURES


- High azimuth discrimination
- Fan-beam
- Functionality 24 h for 360 day/night all-weather conditions.
- Can be remotely driven to select different rotation rates
- Can interface different GEM elettronica radar transceivers
- Maintenance free (MTBF more that 60000 h)
- Compact aspect
- Fully compliant with IALA Guideline No. 1111, Edition 1 (May 2015)

APPLICATIONS

The antenna system series ASX-2101/FD • ASX-1901/FD is targeted to top-ranked applications, such as:

- Vessel Traffic System (VTS), Vessel Traffic Management & Information Systems (VTMIS)
- Coastal Surveillance & Security
- Surface Movement Guidance Control System (SMGCS)
- Homeland Security

GENERAL DIAGRAM OF CONNECTION

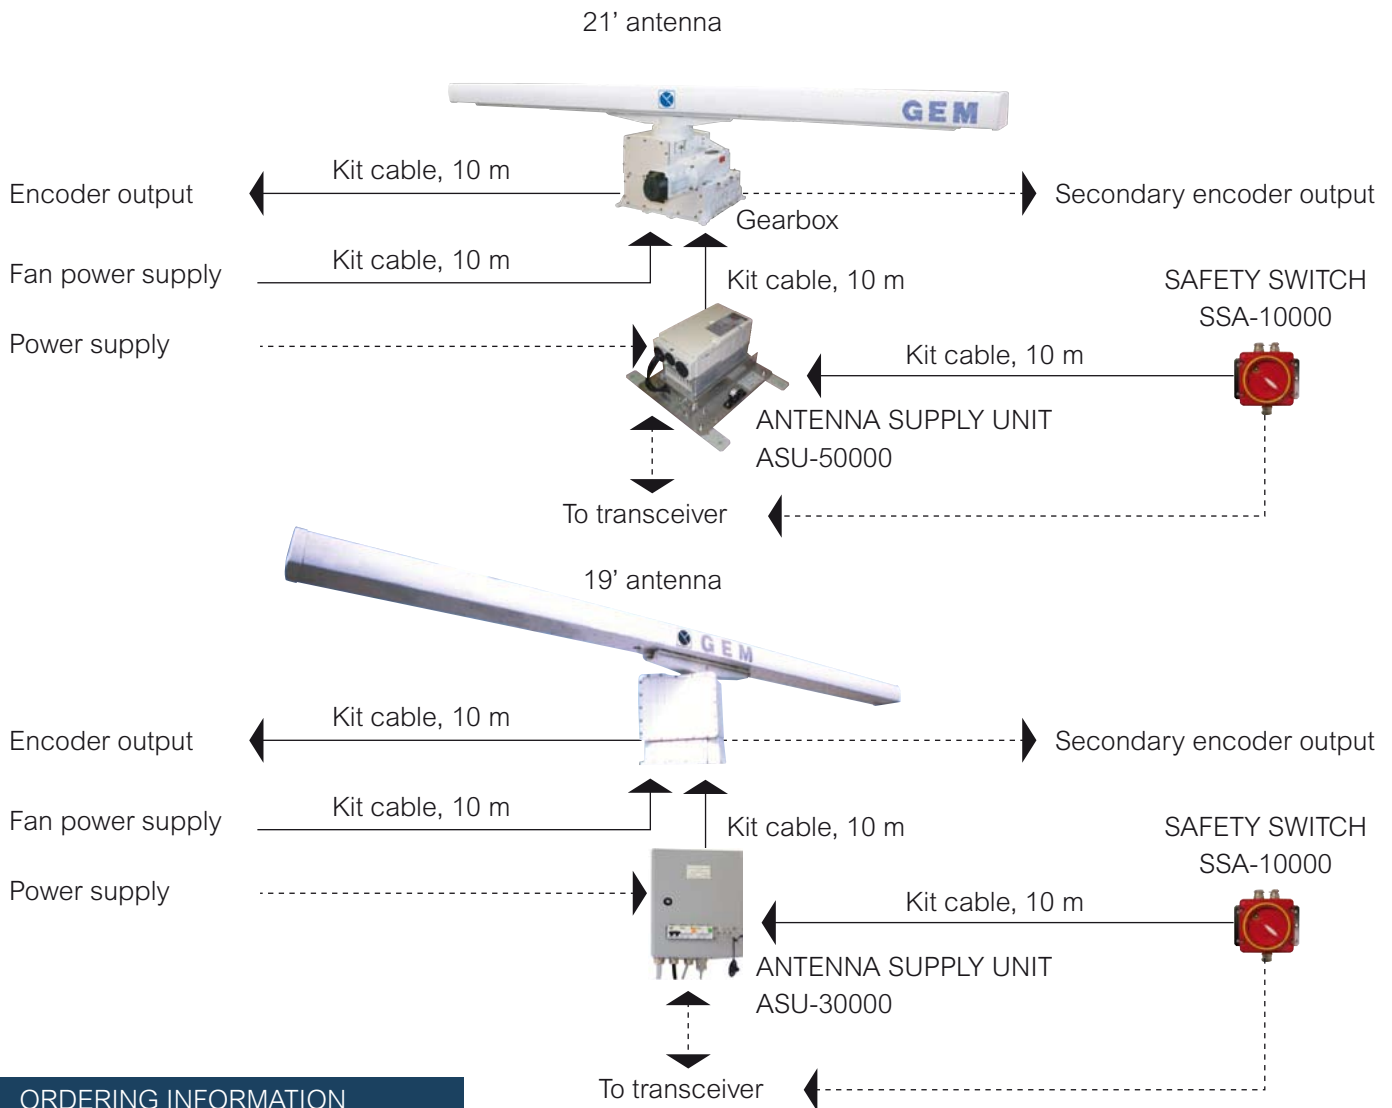

ORDERING INFORMATION

Order Code	Antenna Length	Switchable Polarizations	Nominal center frequency	Antenna Supply Unit	Safety Switch	Gearbox	Tilt	rpm
ASX-2101/FD	21 feet (6.51 m)	Horizontal	9225 MHz 9450 MHz	ASU-50000	SSA-10000	MU-3122	TIM-12000	11, 22
ASX-2101/C/FD	21 feet (6.51 m)	Circular	9225 MHz 9450 MHz	ASU-50000	SSA-10000	MU-3122	TIM-12000	11, 22
ASX-1901/FD	19 feet (5.89 m)	Horizontal	9225 MHz 9450 MHz	ASU-30000	SSA-10000	MU-1022X	TIM-11000	16, 22
ASX-1901/C/FD	19 feet (5.89 m)	Circular	9225 MHz 9450 MHz	ASU-30000	SSA-10000	MU-1022X	TIM-11000	16, 22

SUPPLY COMPOSITION AGAINST EACH ORDER CODE

- Antenna system including gearbox and antenna unit
- Tilt Unit
- Antenna Supply Unit (ASU)
- Safety switch Unit (SSA)
- Connecting cables kit (standard lengths: 10 mt)
- Certificate of conformance
- Packing list

OPTIONS:

- Depending on installation requirements, cable lengths are delivered in accordance with Buyer's instructions
- Can be released at other center frequencies between 8800-9600MHz upon Buyer's requirement
- Use and installation manual in English language

SERIES SPECIFICATIONS

BASIC PERFORMANCE DATA	ASX-2101/FD	ASX-2101/C/FD	ASX-1901/FD	ASX-1901/C/FD
Antenna type:	Slotted waveguide array			
Nominal Center frequencies	9225 MHz and 9450 MHz			
Frequency band around each center frequency	80 MHz			
Array length:	21 feet (6.51 m)		19 feet (5.89 m)	
Polarization:	Horizontal	Circular	Horizontal	Circular
Gain:	38 dBi ± 0.5 dB	38 dBic ± 1 dB	35 dBi ± 0.5 dB	35 dBic ± 1 dB
VSWR:	less than 1.2:1			
Beamwidth (at -3 dB)				
Horizontal:	0.35° ± 0.02°		0.42° ± 0.03°	
Vertical:	11° ± 1°		18° ± 2°	
Sidelobes				
Within ± 10°:	less than -28 dB			
Outside ± 10°:	less than -35 dB			
Azimuth encoders:	16384 or 8192 or 4096 pulses per revolution		2048 or 4096 pulses per revolution	
Rotation speed:	11, 22 rpm		16, 22 rpm	
Drive Motor Power:	3.5 kW		1.5 kW	
Operational wind speed:	up to 100 knots			
ELECTRICAL POWER				
Required supply at ASU input:	mono phase, 50/60 Hz			
Voltage:	220 Vac			
Absorption:	less than 2 kW		less than 1 kW	
ENVIRONMENTAL PERFORMANCES				
Operating temperature range				
Standard	from -25° C to +55° C			
With heating unit	from -40° C to +70° C			
Relative humidity:	up to 100% at +40° C with dehydrator			
Vibrations:	in accordance with IEC-60945			
Vibrations/shock:	1g from 0 to 50 Hz			



ANTENNA and ROTATION UNIT

21' antennas
 Weight
 Antenna Unit: 178 Kg
 Rotation Unit: 245 Kg
 Tilt: 31 Kg

19' antennas
 Weight
 Antenna Unit: 65 Kg
 Rotation Unit: 140 Kg
 Tilt: 28 Kg

ANTENNA SUPPLY UNIT

ASU-50000
 Weight 10 Kg

ASU-30000
 Weight 10 Kg

SAFETY SWITCH

Weight 2 Kg

Surveillance & Security

Guidance, Navigation & Positioning

Military & Defence

Marine Electronics

This brochure should not be considered a contractual offer to sell. The specifications given herein may be changed by the manufacturer, GEM elettronica S.r.l., without notice.

